



No.:

Date: 10-SEP-2020

Customer :

TECHNICAL PROPOSAL  
Three-phase induction motor - Squirrel cage rotor

Product line : TEFC - Explosion Proof - NEMA Premium Efficiency

Catalog Number :

List Price : \$

Notes:

Performed by:

Checked:



No.:

Date: 10-SEP-2020

## DATA SHEET

### Three-phase induction motor - Squirrel cage rotor

Customer :  
Product line : TEFC - Explosion Proof - NEMA Premium Efficiency

Frame : 184T  
Output : 1.5 HP  
Frequency : 60 Hz  
Poles : 6  
Full load speed : 1165 rpm  
Slip : 2.92 %  
Voltage : 575 V  
Rated current : 1.86 A  
Locked rotor current : 12.2 A  
Locked rotor current (I<sub>L</sub>/I<sub>n</sub>) : 6.6  
No-load current : 1.12 A  
Full load torque : 6.67 lb.ft  
Locked rotor torque : 230 %  
Breakdown torque : 330 %  
Design : B  
Insulation class : F  
Temperature rise : 80 K  
Locked rotor time : 35 s (hot)  
Service factor : 1.15  
Duty cycle : S1  
Ambient temperature : -20°C - +40°C  
Altitude : 1000 m  
Degree of Protection : IP55  
Approximate weight : 118 lb  
Moment of inertia : 0.42121 sq.ft.lb  
Noise level : 52 dB(A)

	D.E.	N.D.E.	Load	Power factor	Efficiency (%)
Bearings	6307 2RS	6206 2RS	100%	0.68	87.5
Regreasing interval	---	---	75%	0.59	86.5
Grease amount	---	---	50%	0.47	84.5

Notes:

Performed by


Checked



No.:

Date: 10-SEP-2020

### PERFORMANCE CURVES RELATED TO RATED OUTPUT Three-phase induction motor - Squirrel cage rotor

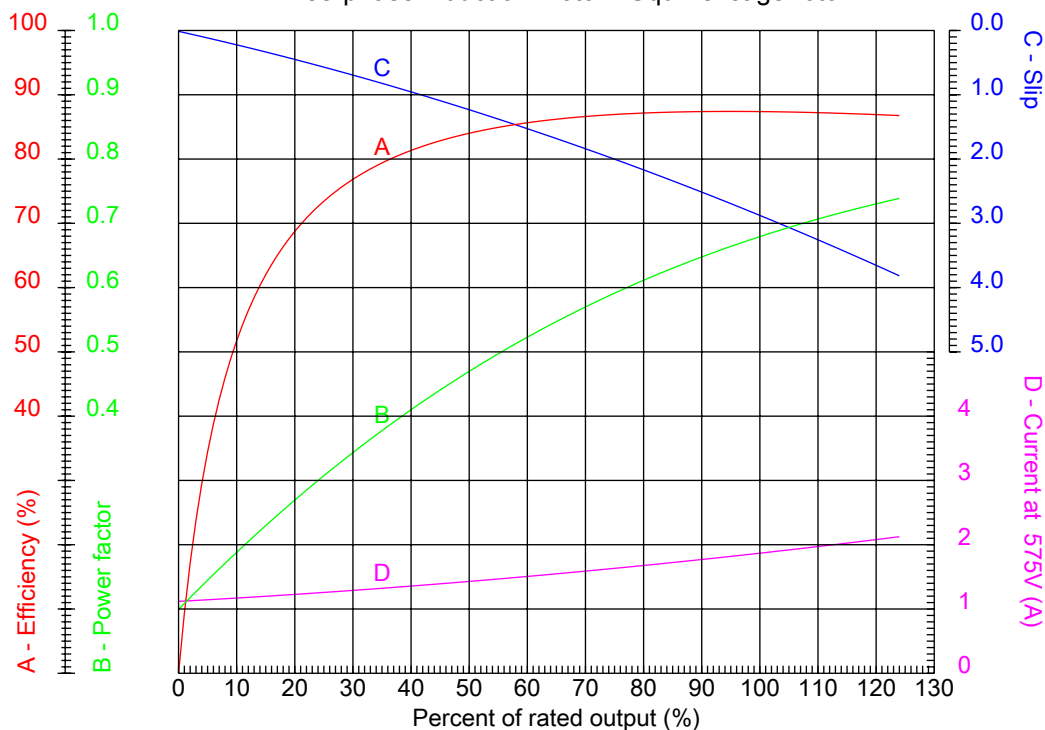

Customer :  
Product line : TEFC - Explosion Proof - NEMA Premium Efficiency

Frame : 184T	Locked rotor current (I <sub>L</sub> /I <sub>n</sub> ) : 6.6
Output : 1.5 HP	Duty cycle : S1
Frequency : 60 Hz	Service factor : 1.15
Full load speed : 1165 rpm	Design : B
Voltage : 575 V	Locked rotor torque : 230 %
Rated current : 1.86 A	Breakdown torque : 330 %
Insulation class : F	

Notes:

Performed by


Checked



No.:

Date: 10-SEP-2020

### CHARACTERISTIC CURVES RELATED TO SPEED Three-phase induction motor - Squirrel cage rotor

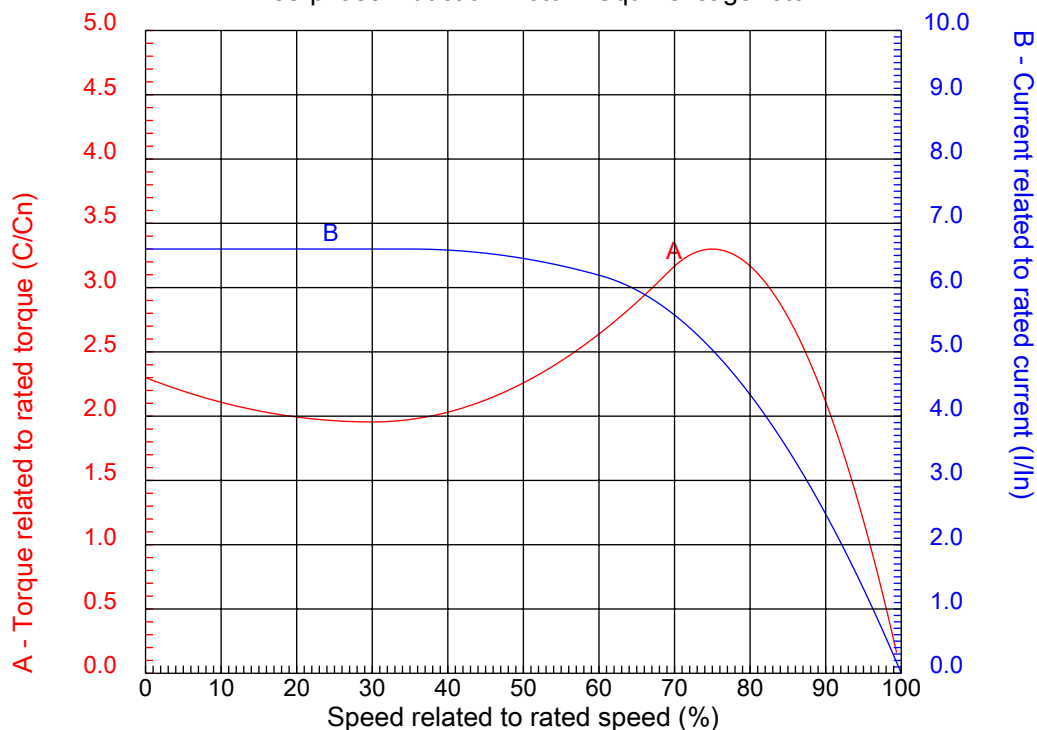

Customer :  
Product line : TEFC - Explosion Proof - NEMA Premium Efficiency

Frame	: 184T	Locked rotor current (I <sub>l</sub> /I <sub>n</sub> )	: 6.6
Output	: 1.5 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.15
Full load speed	: 1165 rpm	Design	: B
Voltage	: 575 V	Locked rotor torque	: 230 %
Rated current	: 1.86 A	Breakdown torque	: 330 %
Insulation class	: F		

Notes:

Performed by

Checked

1 2 3 4 5 6 7 8

A




B

C

D

E

F

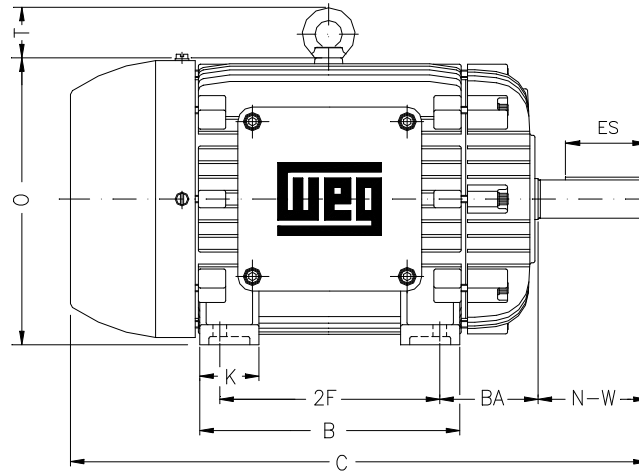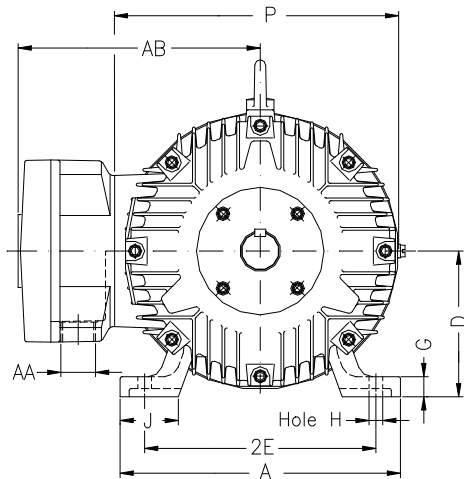

Notes:

Performed by:

Checked:

Customer:

TEFC - Explosion Proof - NEMA Premium Efficiency

Three-phase induction motor  
Frame 184T - IP55

10-SEP-2020



2E 7.500	A 8.661	2F 5.500	B 6.968	BA 2.750
J 1.890	K 1.969	P 8.909	ES 1.969	depth 0.250
S 0.250	N-W 2.750	U 1.125	R 0.984	AB 8.248
D 4.500	G 0.787	O 9.421	T 1.772	H 0.406
C 15.866	AA NPT 3/4"	d1 A 4	d2 A 4	